

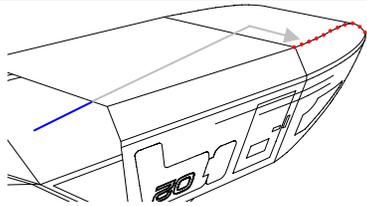
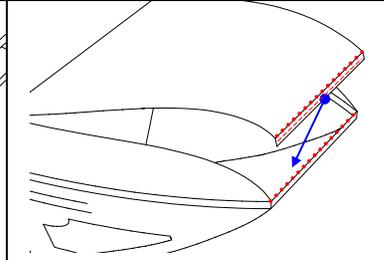
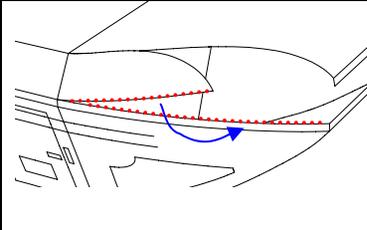
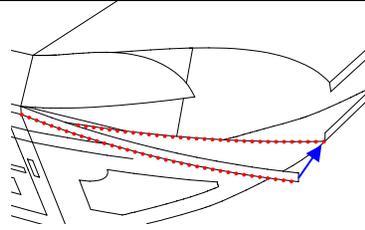


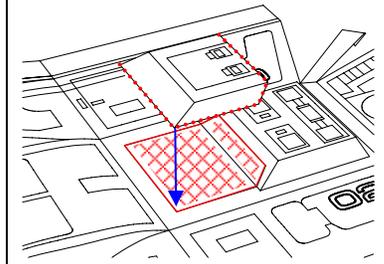
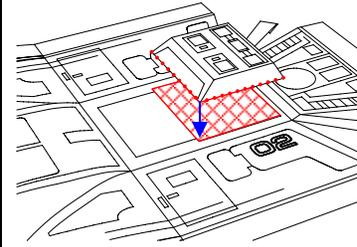

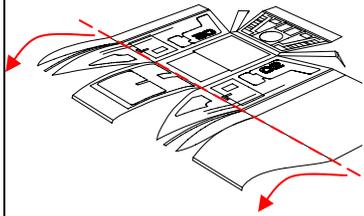
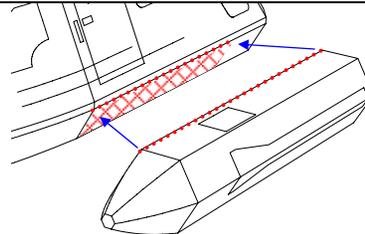








SHUTTLEPOD
TYPE 17
ASSEMBLY INSTRUCTIONS

Gently curl nose panels



align seam from inside

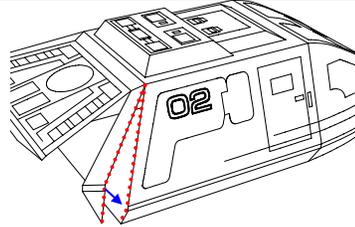

Tools and Materials: ruler - scissors - craft knife - awl or other pointed tool for scoring fold lines - white glue - cutting mat - toothpicks or small paintbrush - tweezers or needle-nose pliers.
CAUTION: Knives and scissors should only be used with proper adult supervision. Use glue sparingly and only in a well ventilated area.

Printing Tips: Print on 67 lb Cover Stock. Select "Auto-rotate and Center". Do not select "Fit to Page"

Assembly Instructions:

- Before cutting, carefully score all fold lines using the ruler and awl or other pointed tool. Be careful not to cut through the paper.
- Use the ruler and craft knife to carefully cut out each piece.
- Fold and dry fit each piece before gluing.
- Use a toothpick or small paintbrush to apply glue to the glue tabs.
- Use tweezers or pliers to clamp the glue tabs until dry.